


SPK2-RS15-0.5

0004180

| | |
|---------------------|---------------------------------|
| Model | SPK2-RS15-0.5 |
| Construction | for AXDV-C3 & -C4 |
| Type | |
| Version | Round spray 15° / Nozzle 0.5 |

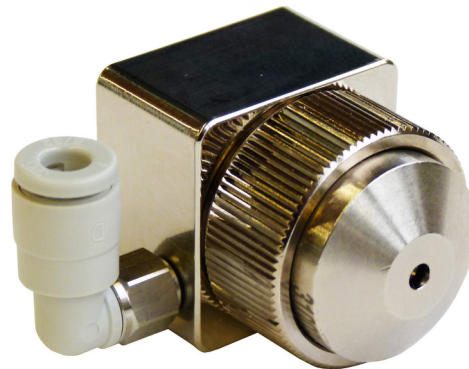

Description

Super Cleanliness - Process reliability - Kind of Compatible

Equip any of our proven Metering Valves from Serie AXDV-C1 through -C4 with the new, pneumatically operated SPK spray nozzle.

This turns any Metering Valve into an Atomiser Valve!



Metering Valve AXDV C Serie, Model Standard with
Spray Nozzle SPK






Metering Valve AXDV C Serie, Model Handgrip PEN
with Spray Nozzle SPK

This Spray Nozzle allows for controlled spraying of the lubricant volume defined by the volumetric Metering Valve AXDV-C1 through -C4, independently from the viscosity, operating pressure and time. A clean, efficient and reliable process!

Technical Data

Connection diagram

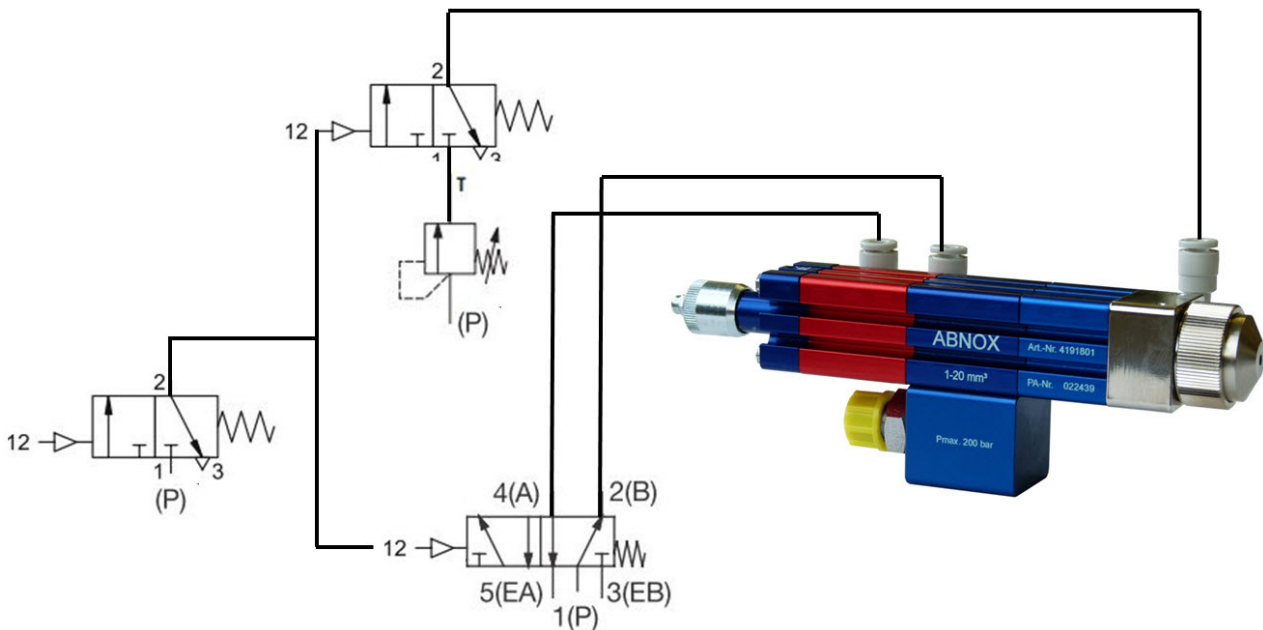

0004180

Connection (compressed air) internal thread

M3 for hose $\varnothing 4/2$

Min. / Max. inlet operating pressure [bar]

20 / 200


Nozzle dia. (mm)

0.5

Air Flap

Round spray 15°

Downloads



Dimensioned Sketch

Download PDF, 0.1 MB



Instruction manual

Download PDF, 0.7 MB

3D-Data

Download STP, 3.1 MB

